

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization International Bureau



(43) International Publication Date
30 June 2005 (30.06.2005)

PCT

(10) International Publication Number
WO 2005/058534 A1

(51) International Patent Classification⁷:

B23C 5/20

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NL, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(21) International Application Number:

PCT/SE2004/001853

(22) International Filing Date:

13 December 2004 (13.12.2004)

(25) Filing Language:

English

English

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CE, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(30) Priority Data:

0303371-9 16 December 2003 (16.12.2003) SE


(71) Applicant (for all designated States except US): **SANDVIK AB** [SE/SE]; S-811 81 Sandviken (SE).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: MILLING TOOL WITH OVERLAPPING INSERTS

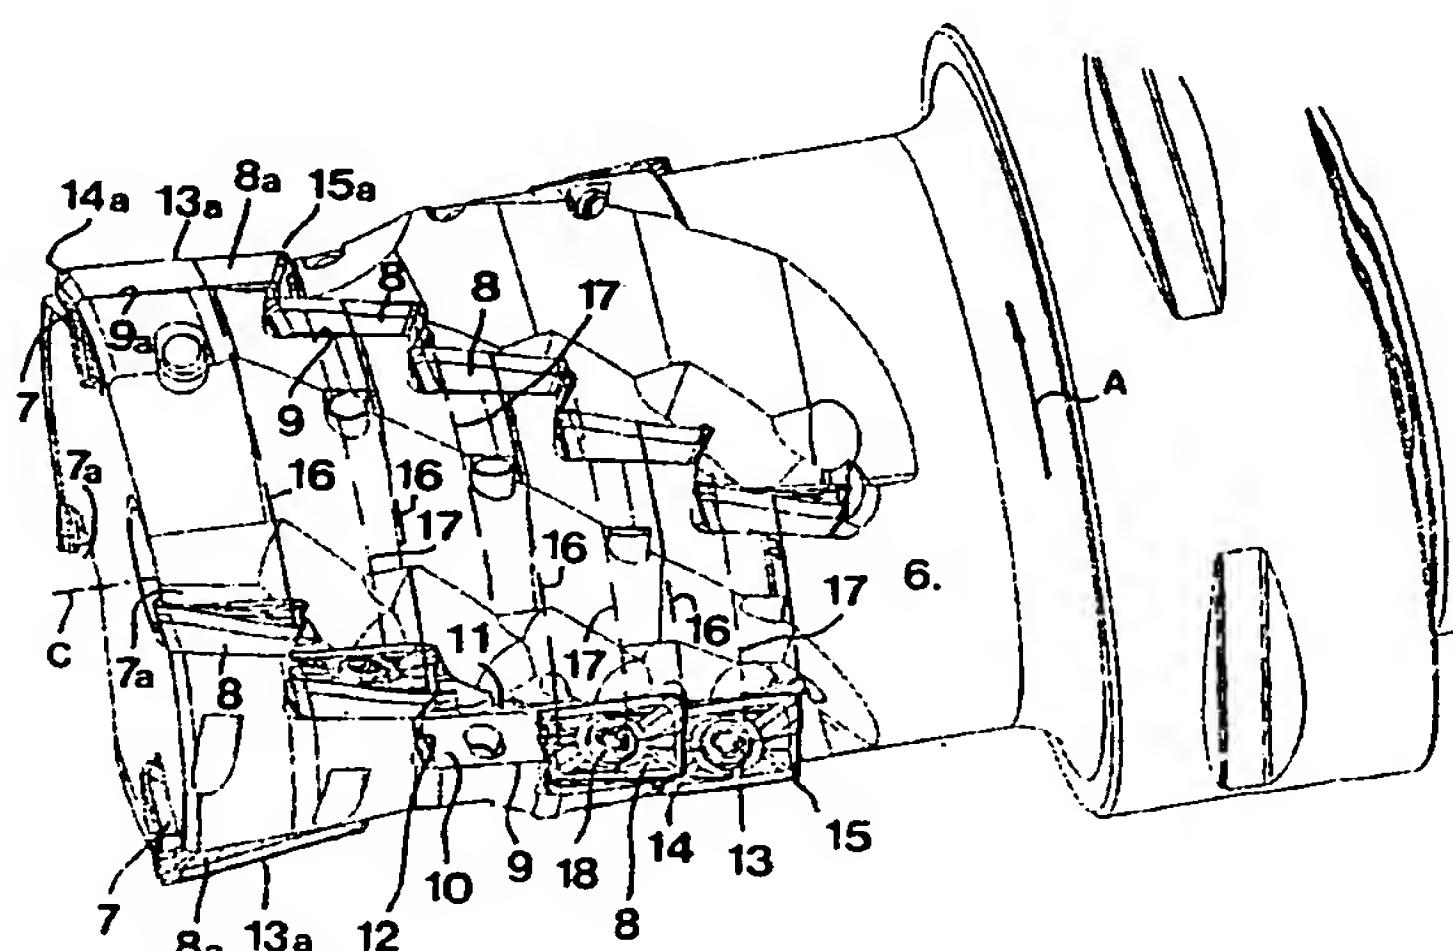

(57) Abstract: The invention relates to a cylindrical cutter of the type that comprises a milling body (1) rotatable around a geometrical axis (C) having an envelope surface (6) extending rearward from a end (5), in which surface a plurality of tangentially spaced flutes (7, 7a) are formed, which separately includes a plurality of axially spaced-part insert pockets (9) for releasably mounted cutting inserts (8), the active edges (13) of which are partially overlapping each other, more precisely in imaginary, radially extending overlapping planes (16, 17). According to the invention, a first insert pocket (9a) located closest to the front end (5), together with the appurtenant cutting insert (8a) in a first flute (7), has another length than the other insert pockets and the cutting inserts, respectively, in the same flute in order to axially displace said overlapping planes (16, 17) in relation to each other and in such a way guarantee that the machined surface always is passed by at least one entire edge, at the same time as the cutting edges of all front cutting inserts extend up to a common radial plane adjacent to the front end while forming a full effective milling cutter.

WO 2005/058534 A1